

06-19-00

A

06/16/00

PATENT APPLICATION TRANSMITTAL LETTER

(Large Entity)

Docket No.
INTL-0372-US (P8591)

TO THE ASSISTANT COMMISSIONER FOR PATENTS

Transmitted herewith for filing under 35 U.S.C. 111 and 37 C.F.R. 1.53 is the patent application of:

ERIC C. HANNAH and BENJAMIN M. CAHILL, III

For: CONDITIONAL ACCESS TELEVISION SOUND

Enclosed are:


- ☒ Certificate of Mailing with Express Mail Mailing Label No. EL541982854US
- ☒ Four (4) sheets of drawings.
- ☐ A certified copy of a application.
- ☒ Declaration ☒ Signed. ☐ Unsigned.
- ☒ Power of Attorney
- ☐ Information Disclosure Statement
- ☐ Preliminary Amendment
- ☒ Other: Recordation Form Cover Sheet; Assignment and check for \$40.

CLAIMS AS FILED

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	21	- 20 =	1	x \$18.00	\$18.00
Indep. Claims	3	- 3 =	0	x \$78.00	\$0.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					\$0.00
BASIC FEE					\$690.00
TOTAL FILING FEE					\$708.00

- ☒ A check in the amount of \$708.00 to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge and credit Deposit Account No. 20-1504 as described below. A duplicate copy of this sheet is enclosed.
- ☐ Charge the amount of as filing fee.
- ☒ Credit any overpayment.
- ☒ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
- ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).

Dated: June 16, 2000


 Signature
 Timothy N. Trop, Reg. No. 28,994
 TROP, PRUNER & HU, P.C.
 8554 Katy Freeway, Suite 100
 Houston, Texas 77024
 Phone: (713) 468-8880
 Fax: (713) 468-8883



21906

cc:

Customer No. 21906

PATENT TRADEMARK OFFICE

APPLICATION

FOR

UNITED STATES LETTERS PATENT

TITLE: CONDITIONAL ACCESS TELEVISION SOUND

INVENTORS: ERIC C. HANNAH and BENJAMIN M. CAHILL, III

Express Mail No.: EL541982854US

Date: June 16, 2000

009790"40856560

CONDITIONAL ACCESS TELEVISION SOUND

Background

This invention relates generally to systems for conditional access to television programming.

5 In a conditional access television system, access to the television programming is limited to certain viewers who pay to receive the programming. In some cases, the audio and video portions of the broadcast are digitally encrypted at the broadcast head end and decrypted at the receiver end.

10 In other cases, analog broadcast systems may be utilized. In analog systems, a graphics overlay may be provided at the head end over the analog television programming to make it difficult for one to watch the programming. Conventionally, the overlay provides
15 distortions and horizontal lines that disrupt the picture so that very little content can be discerned.

Analog conditional access television systems generally do not distort the audio. In some cases, the audio may have considerable value. Thus, it would be desirable to
20 also distort the accompanying audio information so that only authorized receivers may enjoy the audio.

Human perception of sound is much more precise than human visual perception. Artifacts at an acceptable level

05595804-061600

for the video portion of an analog transmission may be far too large for the audio portion. Moreover, analog television provides an audio channel as a frequency modulated (FM) subcarrier with only 0.75 MHz bandwidth.

5 There are numerous sources of noise and distortion in television broadcasts. These imperfections may disrupt the clean decoding of the audio signal. The most serious artifact is ghosting or multi-path transmission. Ghosting results at the receiver when the primary, first arriving
10 signal is then followed by several delayed, weaker signals. These weaker signals may have been reflected off of intervening obstructions such as buildings, mountains or other structures. The primary, first arriving signal and the weaker signals sum together at the radio frequency
15 input to the television decoder.

Each time a ghost signal is added to the television signal mix, the implicit value of an encoded signal bit is changed. Thus, naïve decoding of the audio signal produces large artifacts due to the ghost signals.

20 Even in cable distribution systems, improper signal splitters, bad cable terminations and other defects produce echoes that have the same effect as multi-path transmission over the air. As a result, these types of distortions may be prevalent in both wireless and wired transmissions.

Thus, there is a need for better ways to provide an analog conditional access television system that adequately protects the audio portion of the television transmission.

Brief Description of the Drawings

5 Figure 1 is a schematic depiction of one embodiment of the present invention;

 Figure 2 is a block diagram showing the transmitter 10 in accordance with one embodiment of the present invention;

10 Figure 3 is a block diagram of the signal processing section of a receiver in accordance with one embodiment of the present invention;

 Figure 4 is a block depiction of the video portion of the receiver and transmitter shown in Figure 1 in one embodiment of the present invention;

15 Figure 5 is a schematic depiction of a portion of the transmitter in accordance with one embodiment of the present invention;

 Figure 6 is a block diagram of a receiver in accordance with one embodiment of the present invention;

20 Figure 7 is a block diagram of the audio processing block shown in Figure 6 in accordance with one embodiment of the present invention; and

 Figure 8 schematically depicts a technique for providing a guard interval in accordance with one
25 embodiment of the present invention.

Detailed Description

Referring to Figure 1, a conditional access analog television broadcast transmitter 10 may transmit, from an antenna 12, subcarriers modulated by analog video information 18 and digital audio information 20. The analog video information 18 may be in a format conventionally used for wired or wireless television broadcasts. An example of a wireless television broadcast is an airwave broadcast and an example of a wired broadcast is a cable system television broadcast.

In accordance with one embodiment of the present invention, the audio information 20 is digitally encoded, compressed and then broadcast on a subcarrier with the analog video information 18 broadcast on an accompanying subcarrier. The transmitted television information (audio and video) may be received by antennas or other video input devices 14 associated with conditional access television receivers 16. A large number of television receivers 16 may be coupled to the audio/video transmission through a conventional antennas or through cable distribution system.

Referring to Figure 2, the signal processing of the transmitter 10 begins by receiving an audio input signal, a video input signal and a clock input signal. The clock signal is utilized to generate an audio subcarrier and a video carrier in the clock generator 104. The audio input

signal is filtered at block 100 and then processed in block 102.

At the same time, the video input signal is filtered in the block 106 and modulated in the block 108 using the video carrier to produce an analog video signal 18. The analog video signal 18 and the digital audio signal 20 are added together in an adder 110. After the signals are filtered at the filter block 112, they may be broadcast from the antenna 12.

On the receiver 16 end, the signal from the antenna or other video source 14 is subjected to video detection in the block 114 in Figure 3. The video detector 114 separates the audio signal 20 from the video signal 18. The video signal is subject to further video processing in the block 116.

A variety of techniques may be used to obscure the analog video signal 18 to prevent interception and viewing by unauthorized persons. In one embodiment, shown in Figure 4, the video frames 202 to be broadcast by the transmitter 10 are received by an obscuration block 220. The block 220 further receives a graphics pattern 204 from a graphics pattern generator 230. The block 220 adds the graphics pattern 204 to the frame 202, to produce an obscured frame 210. A plurality of obscured frames 210 may comprise an obscured video signal 212.

009190-4085660

The graphics pattern generator 230 further produces a pattern identifier 206, to be received by an encryption block 232. In one embodiment, a new pattern identifier is created for each graphics overlay pattern that is generated inside the transmitter 10. The encryption block 232 encrypts the pattern identifier 206, to produce an encrypted pattern identifier 214.

Encrypted pattern identifier 214 may then be transmitted with the obscured analog video signal 212. Accordingly, adder 234 combines the signals 212 and 214 to produce an obscured analog video signal 18 that includes encrypted pattern information. In one embodiment of the present invention, the encrypted pattern identifier 214 is transmitted on the vertical blanking interval (VBI) of the obscured analog video signal 218.

The receiver 16 includes a graphics subsystem 34 with a graphics controller 320 and a frame buffer 312. The subsystem 34 may receive the obscured analog video signal 18 from the transmitter 10. The graphics controller 320 sends each frame of the analog video signal 18 to a frame buffer 312. The graphics controller 320 extracts the encrypted pattern identifier 214 from the incoming signal 216 and sends the signal to a system memory 26.

In system memory 26, decryption 340, followed by a pattern construction 342, are performed on the pattern identifier 214, in one embodiment of the invention. These

operations produce a new graphics overlay pattern 344, to be added to the obscured video frame 18 in the frame buffer 312. An unobscured analog video signal 22 may then be sent to a display such as a television set (not shown).

5 Each graphics pattern 204 may be associated with a pattern identifier 206. The pattern identifier 206 may be used by one or more receivers 16 to recover as much as the original signal 208 as possible.

10 Each frame 202 is coupled with a graphics pattern 204 to produce an obscured frame 210. The frame identifier 206 associated with the graphics pattern 204 is added to the obscured frame 210, to produce an obscured and encoded signal 18, prior to transmission. The transmitter 10 may then send the obscured signal 18 to a receiver 16. Without
15 removing the obscuration from the signal 18, an interceptor of the signal can only view an image that is confusing and frustrating.

20 In the receiver 16, obscuration removal software directs the graphics controller 320 to send the video frame 210 to the frame buffer 312 and the encrypted pattern identifier 24 to the system memory 26. The obscuration removal software encrypts the pattern identifier 214 residing in the system memory 26. From the decrypted pattern identifier, the software may further construct a
25 graphics pattern that is complementary to the graphics pattern 204 created at the transmitter 10.

009190-061600

The obscuration removal software may direct the graphics controller 320 to add the complementary graphics pattern to the frames in the frame buffer 312. A combination of the complementary graphics pattern and the contents of the frame buffer 312 substantially removes the obscuration from the analog video signal 18.

Referring to Figure 5, the broadcast transmitter 10 generates a digital audio signal 20 from an analog audio signal received by analog to digital converter 42. The converter 42 converts the audio signal into a digital form so it can be compressed in a compressor 44. Any of a wide variety of compression techniques may be utilized including those in accordance with The Motion Picture Experts Group compression standards MPEG-1, layer 3, International Organization for Standardisation (Geneva Switzerland) ISO/TEC 11172-3 (1993) (commonly called "MP3"). In one embodiment of the present invention, a bit stream of a 100 Kbits per second may result.

The compressed audio stream may be compressed sufficiently to be useful with the bandwidth available for the audio component of the television broadcast. The compressed audio stream may be encrypted in an encryption unit 45. Any conventional digital encryption technique may be utilized.

Next, the encrypted, compressed bit stream is modulated in a modulator 46. The modulator 46 modulates

the frequency-modulated subcarrier produced by the television transmitter 10. The modulator 46 may also band limit the signal to avoid interference between the video and audio components. A band limited digital audio signal results that may only be perceived, if intercepted, as white noise.

Likewise, a video signal modulator (not shown) may band limit the video signal for the same reason. The analog video signal 18 may be modulated using conventional analog amplitude modulation techniques on the video carrier and transmitted with the audio signal 20 modulated onto the audio subcarrier.

The modulated audio signal may be converted into a plurality of frequency division subchannels. In Figure 3, four such subchannels are shown for illustration purposes. Each of the subchannels is then subjected to an inverse fast Fourier transform (IFFT) in the unit 48 to implement Orthogonal Frequency Division Multiplexing in one embodiment.

Orthogonal Frequency Division Multiplexing (OFDM) is a multi-carrier transmission technique. It separates the available spectrum into many subcarriers. Each subcarrier may be modulated by a low rate data stream. OFDM may use the spectrum efficiently by spacing the channels more closely than is possible with other techniques. This may be achieved by making all the subcarriers orthogonal to one

another, preventing interference between the closely spaced subcarriers.

Conventionally, the minimum required bandwidth for speech is only three kilohertz. The allocated bandwidth in practical systems may be greater than the minimum to prevent subchannels from interfering with one another. The resulting added bandwidth enables signals from neighboring channels to be filtered out and allows for drift in the center frequency of the transmitter and receiver. As much as fifty percent of the total spectrum may be wasted through the use of extra spacing between channels.

OFDM splits the available bandwidth into many narrow channels (for example from one hundred to eight thousand). The subcarriers for each channel are made orthogonal to one another. As a result, they may be spaced very closely together. The orthogonality of the carriers means that each carrier has an integer number of cycles over a symbol period. As a result, the spectrum of each carrier has a null at the center frequency of each of the other subcarriers. This reduces the interference between subcarriers, allowing them to be spaced closely together.

Each subcarrier in an OFDM signal has a very narrow bandwidth resulting in a low symbol rate. This results in a signal having a high tolerance to multi-path transmissions. The delay spread from multi-path

transmissions must be very long to cause significant signal interference in a properly designed OFDM system.

5 The OFDM signal is generated by first choosing the spectrum required, based on the input data and the modulation scheme. Each subcarrier is assigned some data to transmit. The required amplitude and phase of the subcarrier is then calculated based on the modulation scheme. Typical modulation schemes include differential Binary Phase Shift Keying (BPSK), Quadrature Phase Shift Keying (QPSK) or Quadrature Amplitude Modulation (QAM).
10 The needed spectrum is then converted back to the time domain using an inverse Fourier transform, such as an inverse fast Fourier transform (IFFT).

15 A fast Fourier transform transforms a cyclic time domain signal into its equivalent in the frequency domain. This may be done by finding the equivalent waveform, generated by the sum of orthogonal sinusoidal components. The amplitude and phase of the components represent the frequency spectrum of the time domain signal. The IFFT unit 48 performs the reverse process, transforming the
20 amplitude and phase of each component into a time domain signal. Each datapoint in the frequency spectrum used for an FFT or an IFFT is called a bin.

25 The orthogonal carrier used in the OFDM signal can be easily generated by setting the amplitude and phase of each bin and then performing the IFFT. Since each bin of an

IFFT corresponds to the amplitude and phase of a set of orthogonal sinusoidal signals, a reverse process guarantees that the carriers generated are orthogonal.

5 The inverse Fourier fast transform signal is then converted from a parallel to a serial format and from a digital to an analog format, in the digital to analog converter 50, resulting in a digital audio signal 20. The signal 20 is broadcast by the transmitter 10 on a subcarrier.

10 Referring to Figure 6, the receiver 16 may include a processor 22 coupled to a north bridge 24 in one embodiment. The north bridge 24 is coupled between a bus 28 and system memory 26. The bus 28 couples a south bridge 30 and a graphics subsystem 34. The graphics subsystem 34 includes a frame buffer 312.

15 The graphics subsystem 34 is coupled to a TV tuner/capture card 38. The card 38 is coupled to an audio processing section 40 which receives both the audio 20 and video signals 18 from an antenna or other video input device 14. The TV tuner/capture card 38 is also coupled to an audio coder/decoder (CODEC) 32 which is in turn coupled to the south bridge 30.

20 Turning next to Figure 7, the audio processing section 40 takes the audio signal 20 and converts it into a digital form in analog to digital converter 52. The converter 52 also takes the serial bit stream and converts it into a set

66. The cyclic prefix 66 may be formed by taking a portion of the symbol 68 and using it to form the cyclic prefix.

The use of the cyclic prefix as a guard interval may simplify the channel equalization and the demodulation. It also may maintain carrier synchronization in the receiver.

In general, the guard interval allows time for multi-path signals from a previous signal to die away before the information from the current signal is gathered. Thus, the end of the symbol waveform may be placed at the start of the symbol as a guard interval, in one embodiment of the invention. This effectively extends the length of the symbol while maintaining the orthogonality of the waveform.

In a first embodiment of the present invention, an analog audio signal may be generated that can directly modulate the conventional FM subcarrier of a television transmitter 10. The synthesized analog signal is limited to fifteen kilohertz of bandwidth. In a second embodiment, a waveform may be directly synthesized to replace the normal frequency modulated subcarrier. Then 0.75 megahertz of bandwidth is available.

For regional broadcasting, one may assume a reflection time of two hundred and fifty microseconds. A guard interval 66 time equal to the worst case multi-path delay time may be set at two hundred and fifty microseconds, for example. The guard interval 66 may be less than about one quarter of the symbol 68 duration. Thus, a one-millisecond

symbol 68 time gives ample time for the echoes to die out allowing an accurate determination of the transmitted symbol 68.

5 To allow a large amount of data to be transmitted, the subcarriers are closely spaced to each other's frequency. The optimal frequency spacing is one over the period of the symbol 68, which equals one kilohertz in one embodiment.

10 Thus, in the first embodiment, which uses a conventional FM audio subcarrier, about fifteen carriers may be utilized with an aggregate baud rate of fifteen kilobaud. The baud rate combined with the need to transmit data at one hundred kilobits per second determines that each signal carries about six bits of information.

15 In the second embodiment, seven hundred and fifty carriers may be utilized at a rate of seven hundred and fifty kilobaud. Very simple binary keying with each symbol carrying one bit of information may be used. There are well-developed techniques for producing multi-level, multi-bit symbols.

20 While the present invention has been described with respect to a limited number of embodiments, those skilled in the art will appreciate numerous modifications and variations therefrom. It is intended that the appended claims cover all such modifications and variations as fall
25 within the true spirit and scope of this present invention.

What is claimed is:

1 6. The method of claim 4 including setting the guard
2 interval to a time equal to the worst case multi-path
3 delay.

1 7. The method of claim 6 including setting the
2 multi-path delay time about 250 microseconds.

1 8. The method of claim 7 including setting the guard
2 interval to less than about one quarter of the symbol
3 duration and setting the symbol time to about one
4 millisecond.

1 9. The method of claim 1 wherein modulating a
2 carrier includes using a conventional FM subcarrier and
3 modulating said carrier with said audio signal.

1 10. The method of claim 7 including synthesizing a
2 carrier to form a frequency modulated subcarrier.

1 11. The method of claim 1 wherein generating an
2 analog video signal includes generating an analog video
3 signal with a graphical overlay pattern.

1 12. A television transmitter comprising:
2 a graphics pattern generator that provides a
3 graphics pattern for an analog video signal;

4 an analog-to-digital converter coupled to receive
5 an analog audio signal;
6 a digital encryption stage coupled to said
7 converter; and
8 a modulator coupled to said stage.

1 13. The transmitter of claim 12 wherein said
2 modulator uses orthogonal frequency division multiplexing.

1 14. The transmitter of claim 13 further including an
2 inverse Fourier transform unit coupled to said modulator.

1 15. The transmitter of claim 14 including a digital-
2 to-analog converter coupled to said unit.

1 16. The transmitter of claim 13 including a device
2 that overlays said graphics pattern on an analog video
3 signal.

1 17. The transmitter of claim 13 including a modulator
2 that modulates a carrier with said analog video signal with
3 said overlaid graphics pattern.

1 18. A television receiver comprising:
2 a video detector to separate a received
3 television signal into audio and video components;

	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100	2101	2102	2103	2104	2105	2106	2107	2108	2109	2110	2111	2112	2113	2114	2115	2116	2117	2118	2119	2120	2121	2122	2123	2124	2125	2126	2127	2128	2129	2130	2131	2132	2133	2134	2135	2136	2137	2138	2139	2140	2141	2142	2143	2144	2145	2146	2147	2148	2149	2150	2151	2152	2153	2154	2155	2156	2157	2158	2159	2160	2161	2162	2163	2164	2165	2166	2167	2168	2169	2170	2171	2172	2173	2174	2175	2176	2177	2178	2179	2180	2181	2182	2183	2184	2185	2186	2187	2188	2189	2190	2191	2192	2193	2194	2195	2196	2197	2198	2199	2200	2201	2202	2203	2204	2205	2206	2207	2208	2209	2210	2211	2212	2213	2214	2215	2216	2217	2218	2219	2220	2221	2222	2223	2224	2225	2226	2227	2228	2229	2230	2231	2232	2233	2234	2235	2236	2237	2238	2239	2240	2241	2242	2243	2244	2245	2246	2247	2248	2249	2250	2251	2252	2253	2254	2255	2256	2257	2258	2259	2260	2261	2262	2263	2264	2265	2266	2267	2268	2269	2270	2271	2272	2273	2274	2275	2276	2277	2278	2279	2280	2281	2282	2283	2284	2285	2286	2287	2288	2289	2290	2291	2292	2293	2294	2295	2296	2297	2298	2299	2300	2301	2302	2303	2304	2305	2306	2307	2308	2309	2310	2311	2312	2313	2314	2315	2316	2317	2318	2319	2320	2321	2322	2323	2324	2325	2326	2327	2328	2329	2330	2331	2332	2333	2334	2335	2336	2337	2338	2339	2340	2341	2342	2343	2344	2345	2346	2347	2348	2349	2350	2351	2352	2353	2354	2355	2356	2357	2358	2359	2360	2361	2362	2363	2364	2365	2366	2367	2368	2369	2370	2371	2372	2373	2374	2375	2376	2377	2378	2379	2380	2381	2382	2383	2384	2385	2386	2387	2388	2389	2390	2391	2392	2393	2394	2395	2396	2397	2398	2399	2400	2401	2402	2403	2404	2405	2406	2407	2408	2409	2410	2411	2412	2413	2414	2415	2416	2417	2418	2419	2420	2421	2422	2423	2424	2425	2426	2427	2428	2429	2430	2431	2432	2433	2434	2435	2436	2437	2438	2439	2440	2441	2442	2
--	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	---

A digitally encrypted audio signal may be transmitted with an analog television signal. Access to the analog television video signal may be controlled by using graphics overlay techniques. The use of digital encryption techniques on the audio channel prevents improper interception.

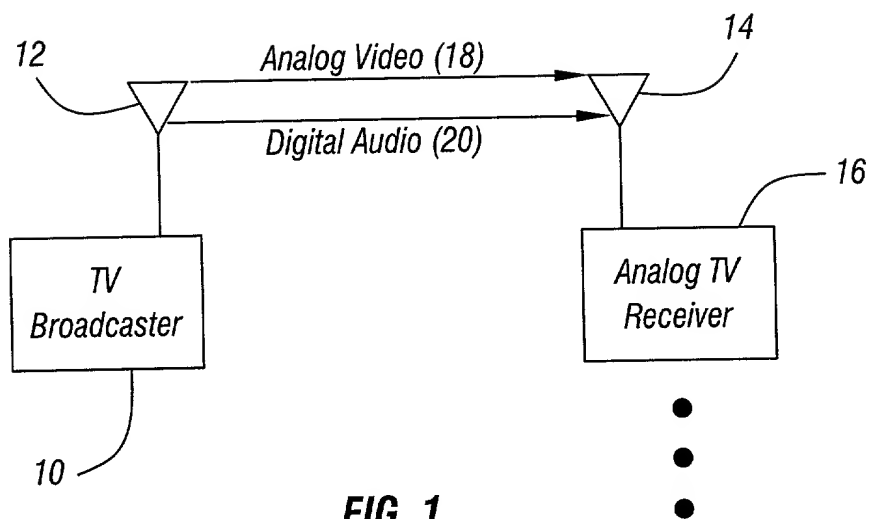


FIG. 1

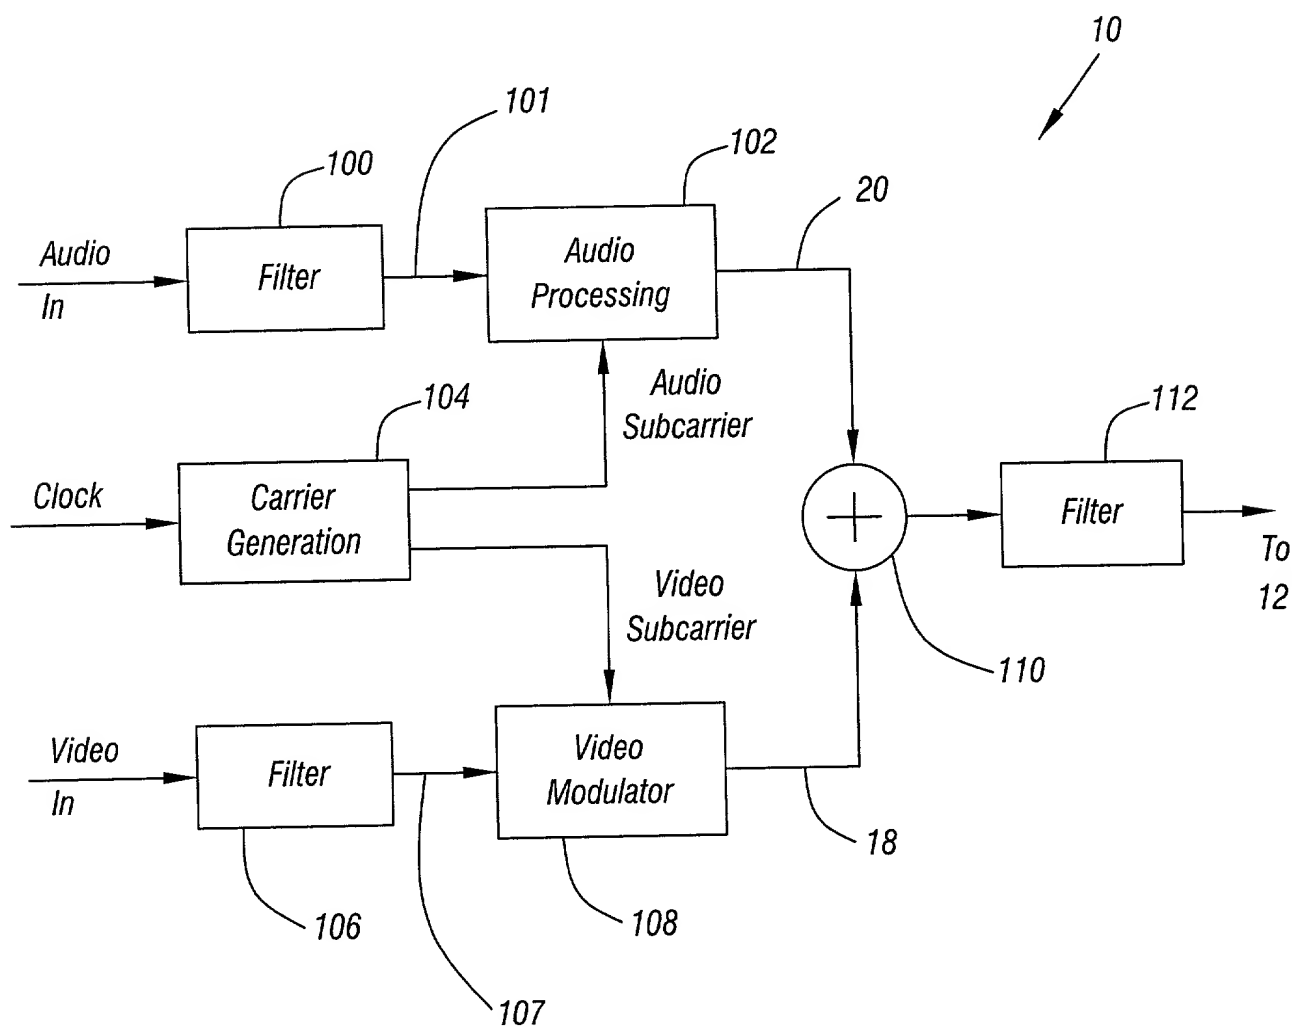
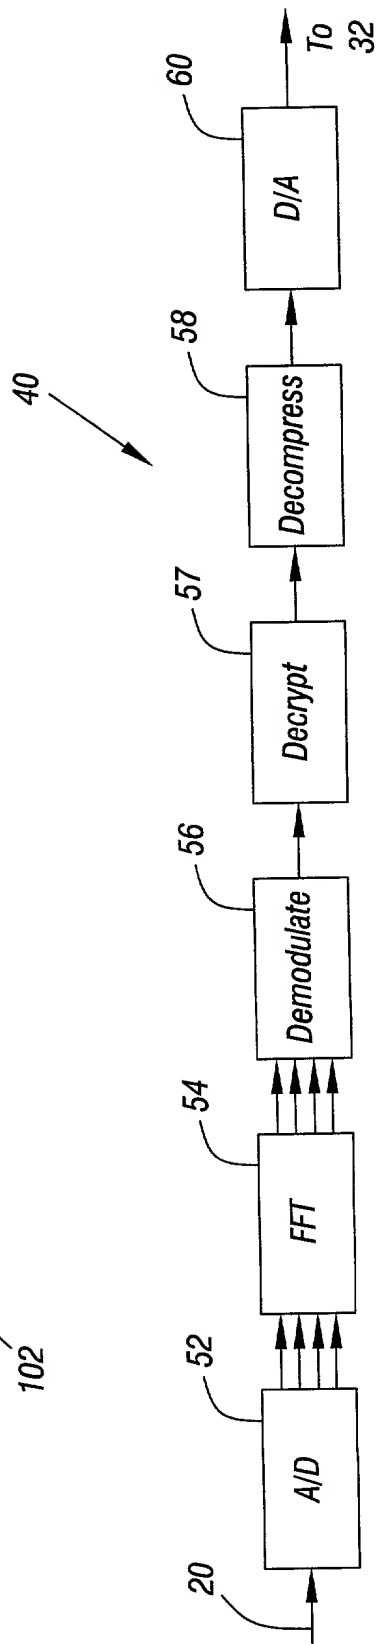
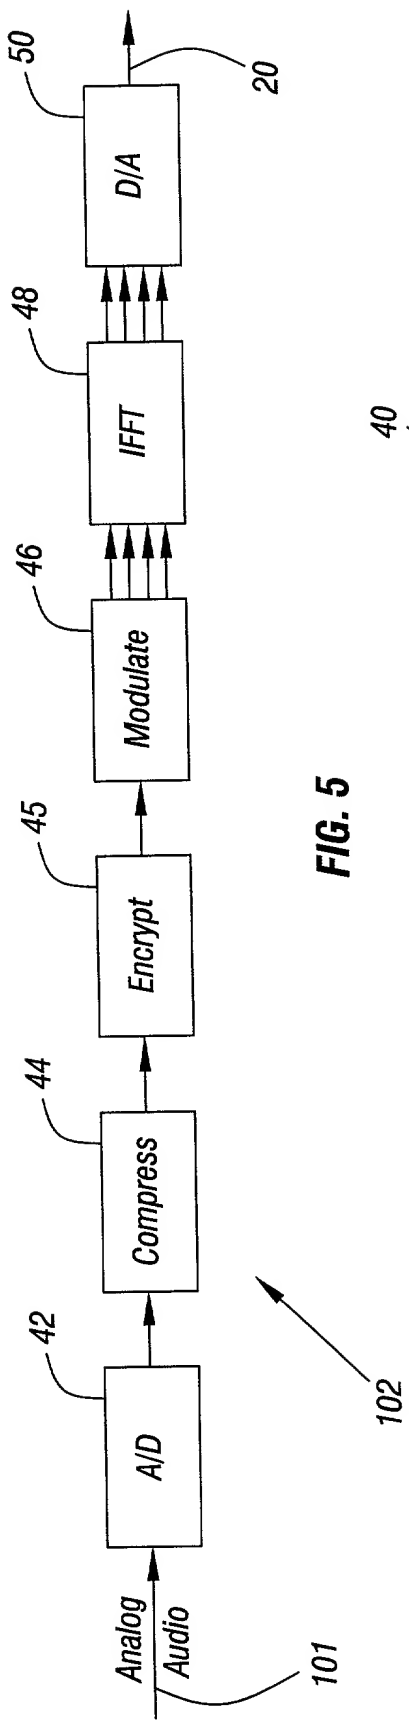
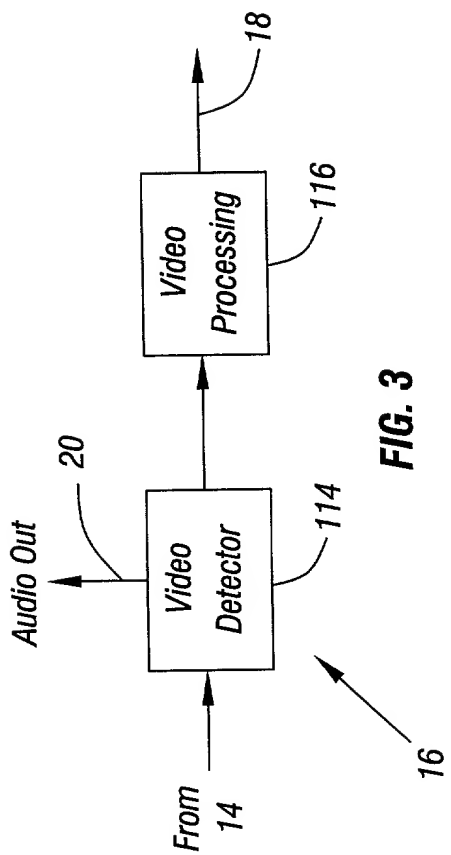
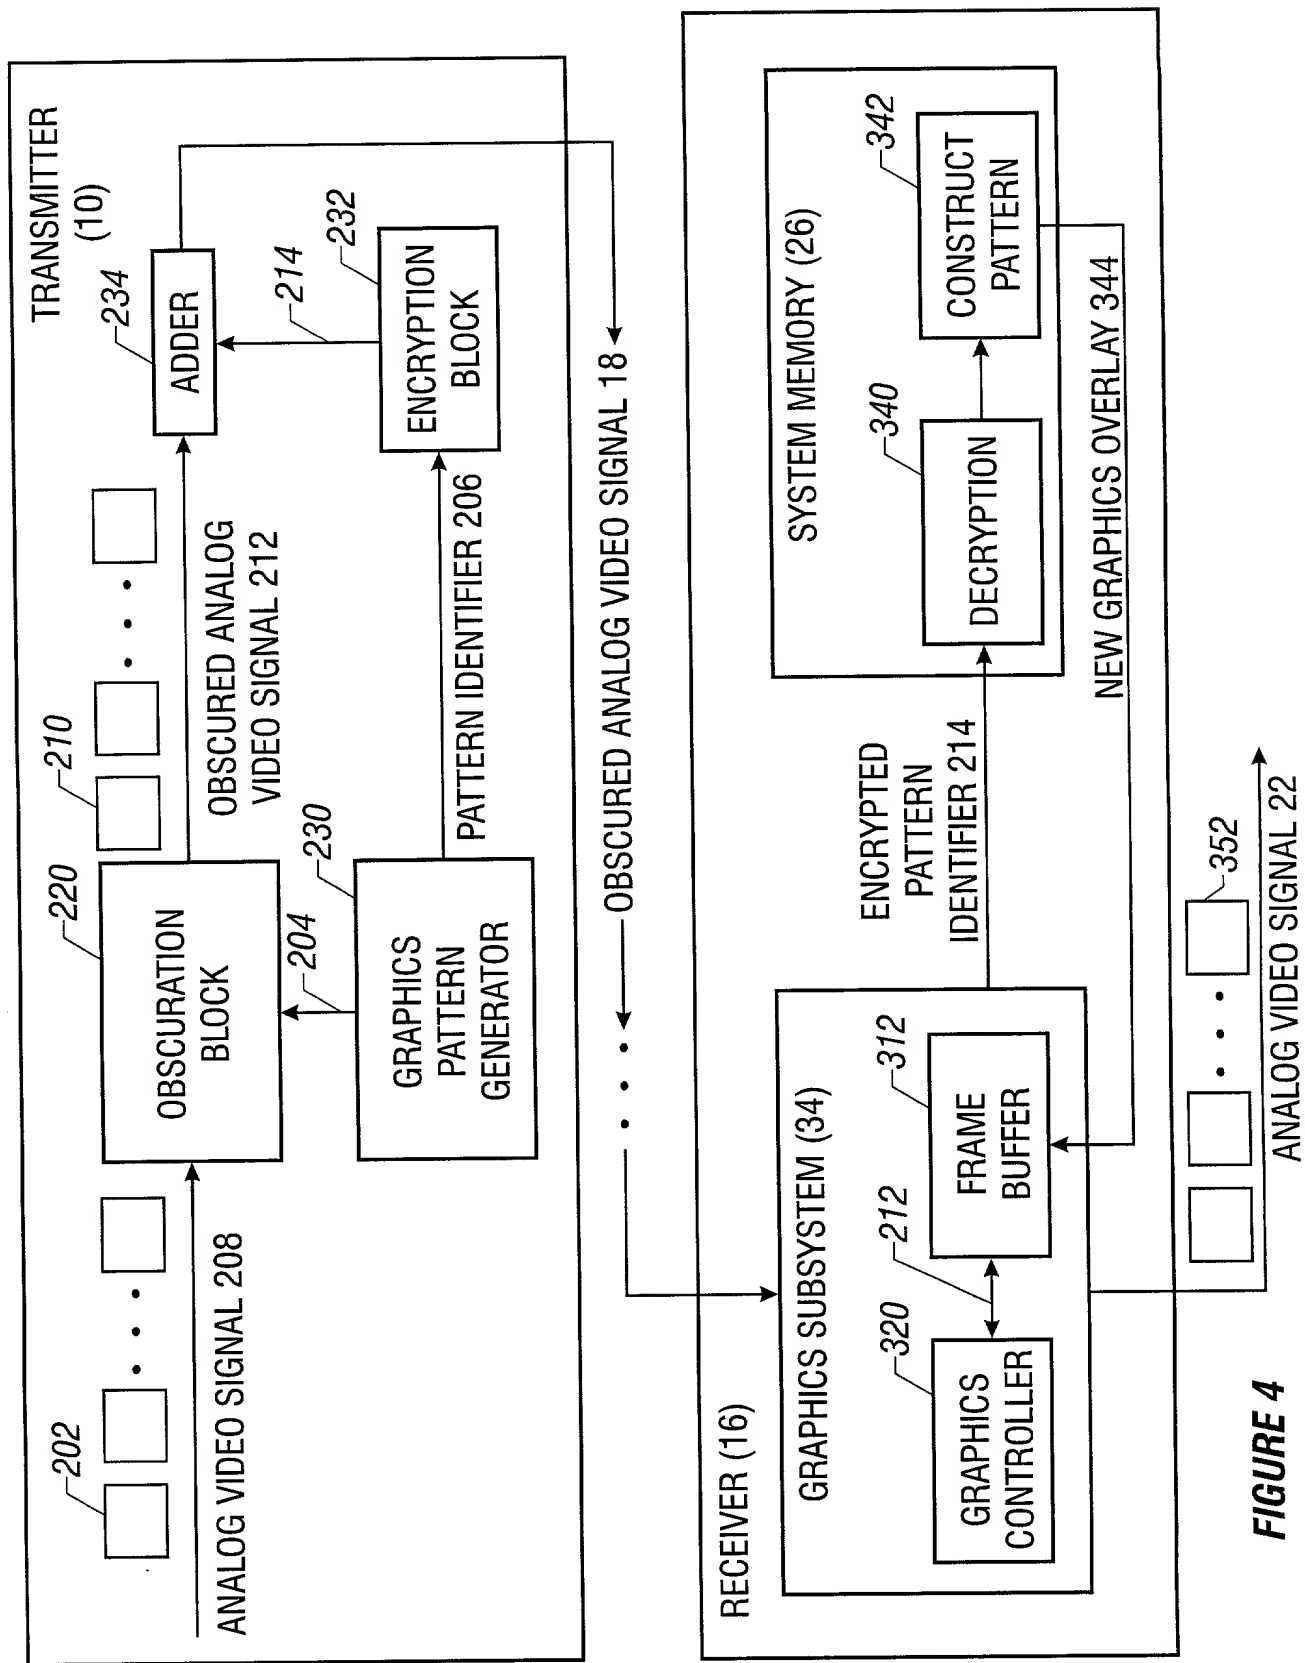


FIG. 2





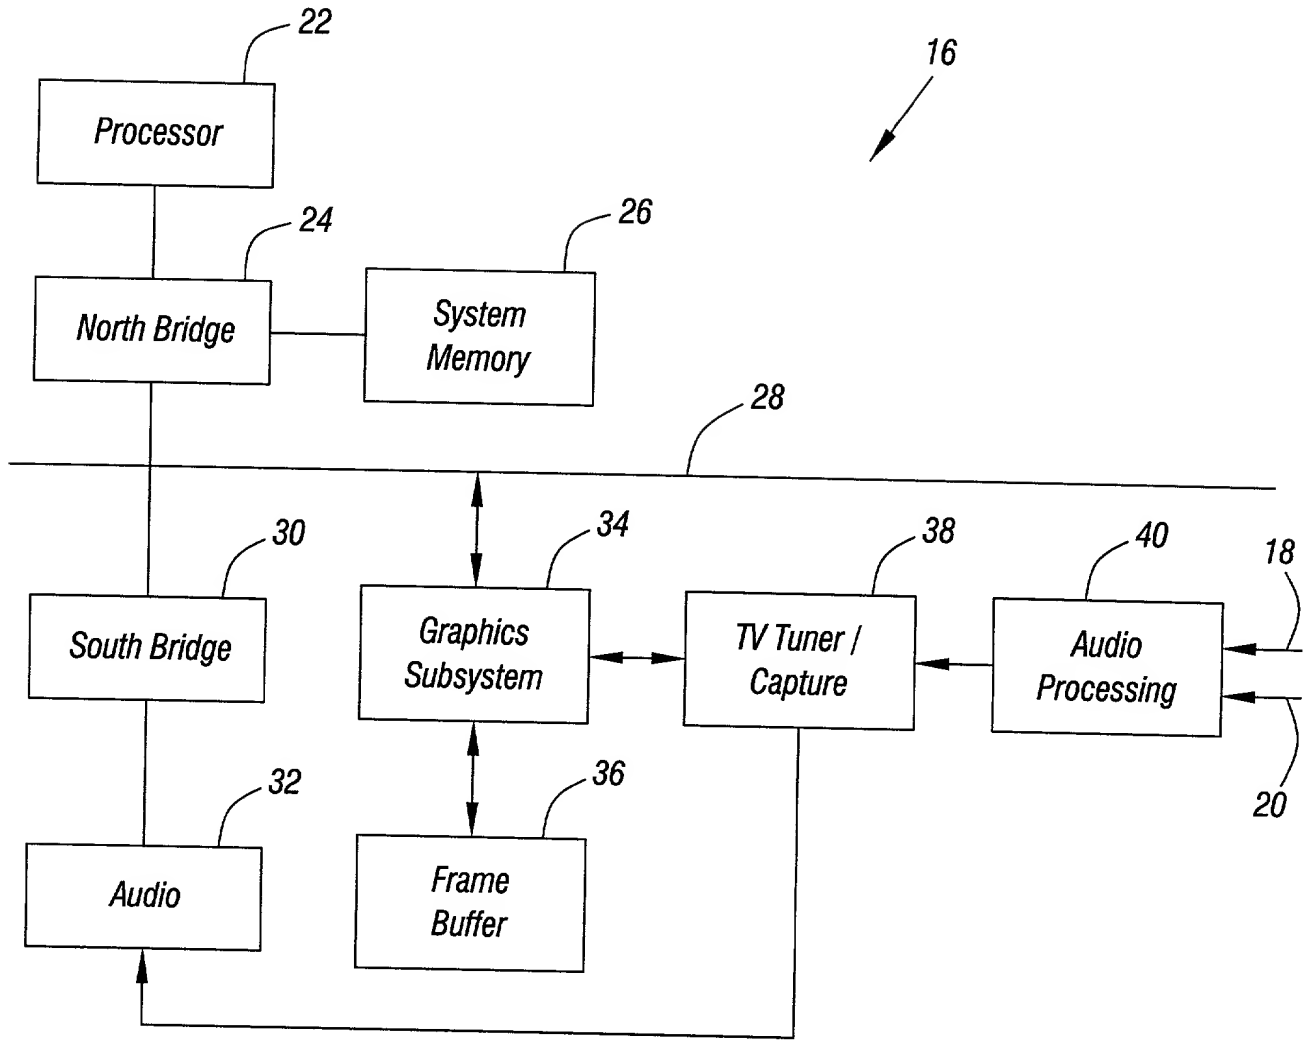


FIG. 6

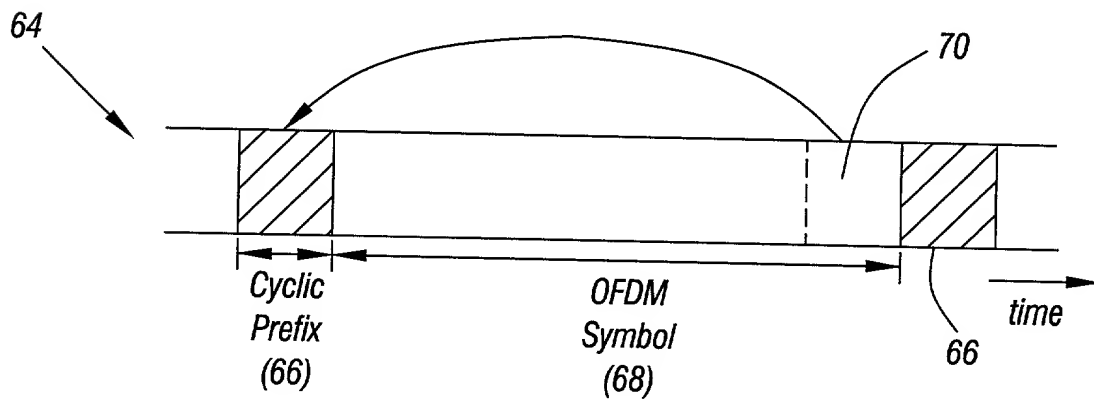


FIG. 8

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below, next to my name.

I believe I am the original, first, and sole inventor (if only one name is listed below) or an original, first, and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

CONDITIONAL ACCESS TELEVISION SOUND

the specification of which

X	is attached hereto.
	was filed on _____ as
	United States Application Number _____
	or PCT International Application Number _____
	and was amended on _____
	(if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claim(s), as amended by any amendment referred to above. I do not know and do not believe that the claimed invention was ever known or used in the United States of America before my invention thereof, or patented or described in any printed publication in any country before my invention thereof or more than one year prior to this application, that the same was not in public use or on sale in the United States of America more than one year prior to this application, and that the invention has not been patented or made the subject of an inventor's certificate Issued before the date of this application in any country foreign to the United States of America on an application filed by me or my legal representatives or assigns more than twelve months (for a utility patent application) or six months (for a design patent application) prior to this application.

I acknowledge the duty to disclose all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d), of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s):			Priority Claimed	
Number	(Country)	(Day/Month/Year Filed)	Yes	No
Number	(Country)	(Day/Month/Year Filed)	Yes	No
Number	(Country)	(Day/Month/Year Filed)	Yes	No

I hereby claim the benefit under title 35, United States Code, Section 119(e) of the United States provisional application(s) listed below:

_____ (Application Number)	_____ (Filing Date)
_____ (Application Number)	_____ (Filing Date)



I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose all information known to me to be material to patentability as defined in Title 37, Code of Federal regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

_____ (Application Number)	_____ Filing Date	_____ (Status-patented, pending, abandoned)
_____ (Application Number)	_____ Filing Date	_____ (Status-patented, pending, abandoned)

I hereby appoint Timothy N. Trop, Reg. No. 28,994; Fred G. Pruner, Jr., Reg. No. 40,779 and Dan C. Hu, Reg. No. 40,025 my patent attorneys, of TROP, PRUNER & HU, P.C., with offices located at 8554 Katy Freeway, Ste. 100, Houston, TX 77024, telephone (713) 468-8880, and Joseph R. Bond, Reg. No. 36,458; Richard C. Calderwood, Reg. No. 35,468; Sean Fitzgerald, Reg. No. 32,027; David J. Kaplan, Reg. No. 41,105; Leo V. Novakoski, Reg. No. 37,198; Naomi Obinata, Reg. No. 39,320; Thomas C. Reynolds, Reg. No. 32,488; Steven P. Skabrat, Reg. No. 36,279; Howard A. Skaist, Reg. No. 36,008; Steven C. Stewart, Reg. No. 33,555; Raymond J. Werner, Reg. No. 34,752; and Charles K. Young, Reg. No. 39,425; my patent attorneys, of INTEL CORPORATION; with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected herewith.

Send correspondence to Timothy N. Trop, TROP, PRUNER & HU, P.C., 8554 Katy Freeway, Ste. 100, Houston, TX 77024 and direct telephone calls to Timothy N. Trop, (713) 468-8880.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole/First Inventor: ERIC C. HANNAH	
Inventor's Signature: 	Date: 6/7/2000
Residence: PEBBLE BEACH, CALIFORNIA	Citizenship: U.S.
Post Office Address: 3046 STRAWBERRY HILL, PEBBLE BEACH, CALIFORNIA 93953	
Full Name of Second/Joint Inventor: BENJAMIN M. CAHILL, III	
Inventor's Signature: 	Date: 5/27/2000
Residence: RINGOES, NEW JERSEY	Citizenship: U.S.
Post Office Address: 353 RILEYVILLE ROAD, RINGOES, NEW JERSEY 08551	

INTL-0372 -US (P8591)

003720-4036550